

SOLARTECH POWER


Customer made

1-120W panel




Solartech 2W solar panel

Power at STC(Pm)	2W
Maximum power voltage(Vpm)	5.93V
Maximum power current(Ipm)	0.35A
Open circuit voltage(Voc)	7.2V
Short circuit current(Isc)	0.38A
Tolerance	±5%
Module efficiency	8.3%
Maximum system voltage	1000V DC

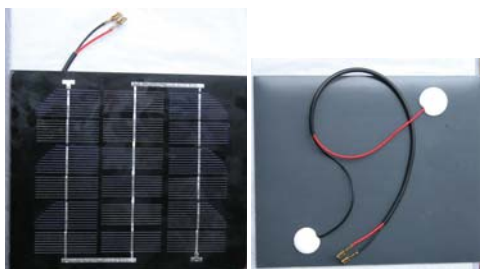

Solartech 3.3W solar panel

Power at STC(Pm)	3.3W
Maximum power voltage(Vpm)	9.14V
Maximum power current(Ipm)	0.362A
Open circuit voltage(Voc)	10.2V
Short circuit current(Isc)	0.411A
Tolerance	±5%
Module efficiency	10%
Maximum system voltage	600V DC

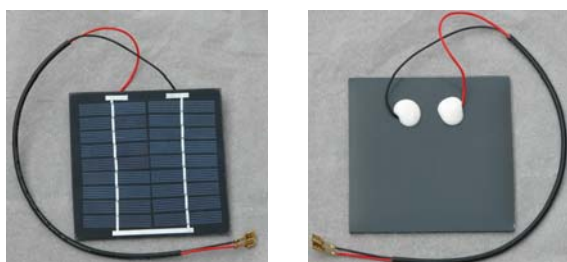

Solartech 1.4W solar panel

Power at STC(Pm)	1.4W
Maximum power voltage(Vpm)	9.2V
Maximum power current(Ipm)	0.165A
Open circuit voltage(Voc)	10.8V
Short circuit current(Isc)	0.18A
Tolerance	±5%
Module efficiency	8.6%
Maximum system voltage	800V DC

Solartech Power customer made panel is covered from 1-120Watt, it is professional to meet our customer's special need. We made them with UL, TUV, IEC and CE approved.

Please contact us for more detail with sales@solartechpower.com