

# SOLARTECH POWER

## SPM004P/005P/006P

### SPECIFICATIONS

CELL	Multicrystalline silicon solar cell 78mmx15.6mm	
No. of cells and connections	36(4x9)	
Dimension of module	350x224x25(mm)	13.8x8.8x0.98(in )
Weight	1.3kg	2.861b

### Characteristics

Model	SPM004P	SPM005P	SPM006P
Power at STC(Pm)	4W	5W	6W
Maximum power voltage(Vpm)	16.8V	17.1V	17.3V
Maximum power current(Ipm)	0.24A	0.29A	0.35A
Open circuit voltage(Voc)	21.3V	21.7V	21.8V
Short circuit current(Isc)	0.28A	0.31A	0.38A
Tolerance	± 5%	± 5%	± 5%
Module efficiency	5.1%	6.4%	7.7%

STC: Temperature 25°C, Irradiance 1000W/m<sup>2</sup>, AM=1.5

### Limits


Operating temperature	-40 to +85°C
Maximum system voltage	600V DC
Series fuse rating	10A

### Components & Mechanical Data

Front Glass	3.2mm tempered
Junction Box	IP-65 rated
Frame	Anodized aluminum alloy type 6063-T5
Encapsulation Material	EVA(0.5±0.05mm thickness)
Back Foil	White PET(0.2±0.03mm thickness)
Temperature Range	-40°C to +90°C
Max Load	5400Pa

### Temperature coefficient

Nominal Operation Cell Temperature	48°C±2°C
Current temperature coefficient	0.06±0.01 %/K
Voltage temperature coefficient	- (78±10) mv/k
Power temperature coefficient	- (0.5±0.05) %/k

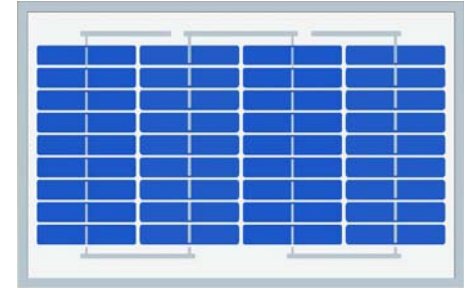

### Back of the module

